


Model: RO

NL	Rotators – 360°	Zonder vorken
FR	Têtes Rotatives – 360°	Sans fourches
EN	Rotators – 360°	Without forks
DE	Rotatoren – 360°	Ohne Gabeln

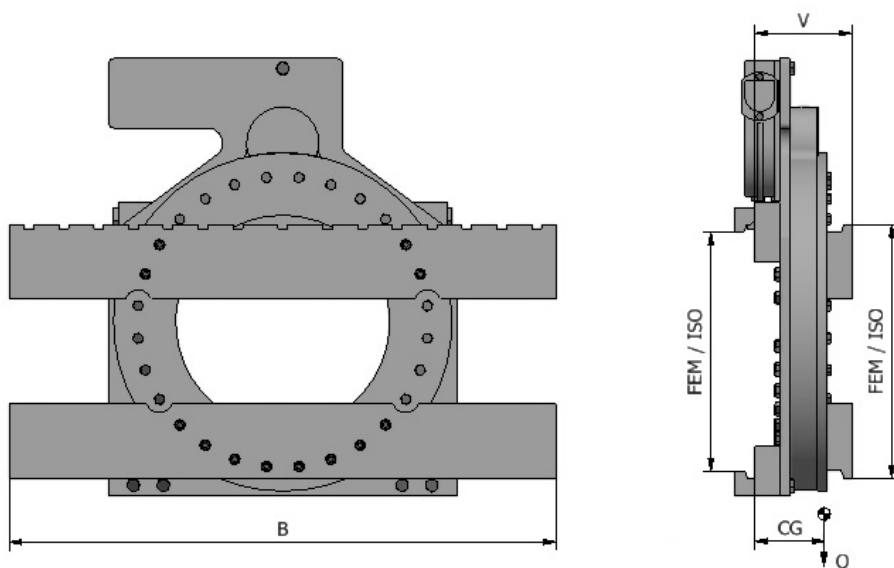

Mod nr	Cap HT T/mm	Cap Q kg/mm	B mm	Nm@125Bar Nm	Debiet/Omw L	V mm	CG mm	Gewicht kg	FEM / ISO
RO 30360 TK	1-2/500	1800/500	900	5300	7	160	85	230	2
RO 40360 TK	2-2,5/500	2500/500	1000	6800	10	160	85	235	2
RO 60360 TK	3-4/500	3000/500	1100	6800	12	180	105	340	3
RO 80360 TK	4-5/500	4000/500	1200	9500	13,5	180	105	450	3
RO 110360 TK	5-6/600	5000/600	1400	12600	13,5	200	120	500	4

NL

Voor intensief gebruik

Vorkvergrendeling regelbaar

Q = Capaciteit / Ladingcenter

Opties:

- Speciale uitvoeringen op aanvraag
- Snelmonteerklauwen
- Plooibare steunvork (L = 1000 mm)

FR

Pour usage intensif

Verrou de fourche réglable

Q = capacité / centre de charge

Options:

- Versions spéciales sur demande
- Crochets a montage rapides
- Fourche support pliable (L = 1000 mm)

EN

For intensive use

Fork lock adjustable

Q = Capacity / Load center

Options:

- Special versions on request
- Quick mounting claws
- Foldable support fork (L = 1000 mm)

DE

Für intensiven Gebrauch

Gabelschloss verstellbar

Q = Kapazität / Lastmitte

Optionen:

- Sonderausführungen auf Anfrage
- Schnellmontagekrallen
- Faltbare Stützgabel (L = 1000 mm)