


Model: RO SS

NL	Rotators – 360°	Zonder vorken, met externe Side Shift (100mm + 100mm)
FR	Têtes Rotatives – 360°	Sans fourches, avec décalage latéral externe (100mm + 100mm)
EN	Rotators – 360°	Without forks, with external Side Shift (100mm + 100mm)
DE	Rotatoren – 360°	Ohne Gabeln, mit externer Seitenverschiebung (100mm + 100mm)

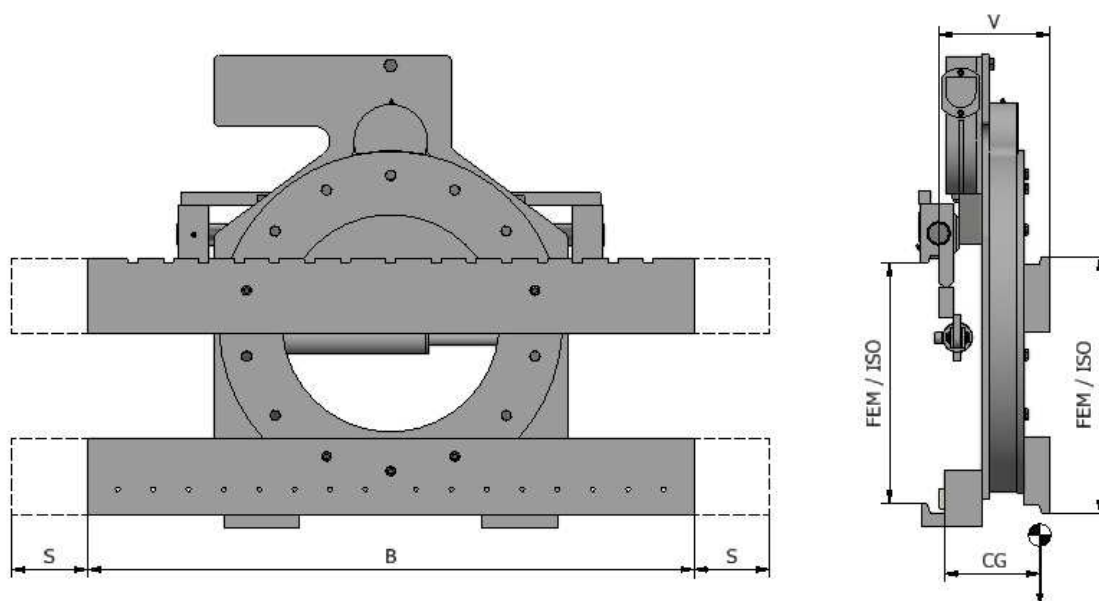

Mod nr	Cap HT T/mm	Cap Q kg/mm	B mm	Nm@125Bar Nm	Debiet L	V mm	CG mm	Gewicht kg	FEM / ISO
RO 30360 TK-SS	1-2/500	1800/500	900	5300	7	175	120	255	2
RO 40360 TK-SS	2-2,5/500	2500/500	1000	6800	10	175	120	260	2
RO 60360 TK-SS	3-4/500	3000/500	1100	6800	12	185	130	380	3
RO 80360 TK-SS	4-5/500	4000/500	1200	9500	13,5	190	135	490	3
RO 110360 TK-SS	5-6/600	5000/600	1400	12600	13,5	210	140	550	4

NL

Voor intensief gebruik

Vorkvergrendeling regelbaar

Q = Capaciteit / Ladingcenter

S = 100mm

Opties:

- Speciale uitvoeringen op aanvraag
- Snelmonteerklauwen
- Plooibare steunvork (L = 1000 mm)

FR

Pour usage intensif

Verrou de fourche réglable

Q = capacité / centre de charge

S = 100mm

Options:

- Versions spéciales sur demande
- Crochets a montage rapides
- Fourche support pliable (L = 1000 mm)

EN

For intensive use

Fork lock adjustable

Q = Capacity / Load center

S = 100mm

Options:

- Special versions on request
- Quick mounting claws
- Foldable support fork (L = 1000 mm)

Model: RO SS**DE**

Für intensiven Gebrauch

Gabelschloss verstellbar

Q = Kapazität / Lastmitte

S = 100mm

Optionen:

- Sonderausführungen auf Anfrage

- Schnellmontagekrallen

- Faltbare Stützgabel (L = 1000 mm)