


Model: CB

NL	Draagdoorn (Hol)	
FR	Eperon Tubulaire (Creux)	
EN	Coil Boom (Hollow)	
DE	Tragedorn (Hohl)	

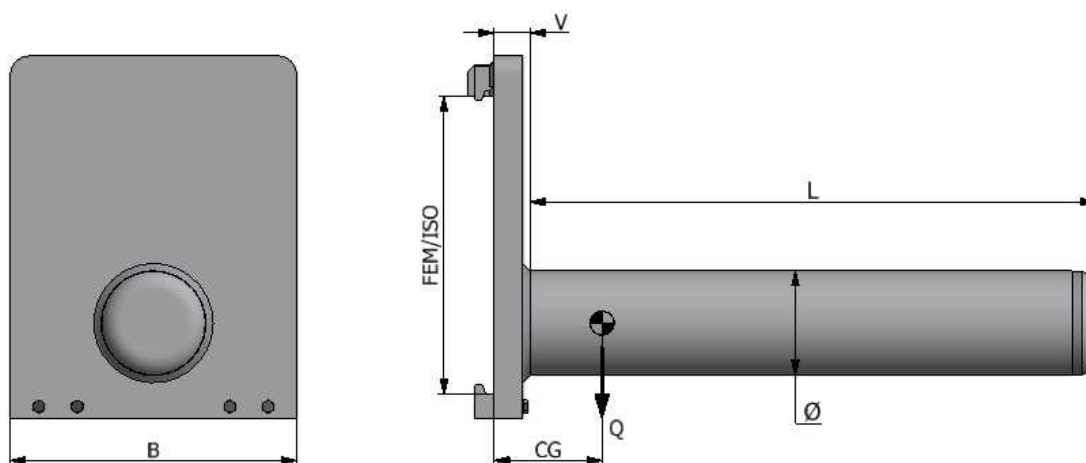


Mod nr	Cap Q kg/mm	Ø mm	B mm	V mm	CG mm	Gewicht kg	FEM / ISO
CB-15	1500/500	115	450	60	210	110	2
CB-25	2500/500	150	450	70	220	140	2
CB-30	3000/500	150	450	70	240	150	3
CB-40	4000/500	180	500	85	240	165	3
CB-50	5000/600	180	600	90	190	200	4 - pin
CB-60	6000/600	180	600	100	185	280	4 - pin
CB-80	8000/600	180	800	110	155	420	4 - pin
CB-100	10T/600	254	800	130	145	595	pin
CB-120	12T/600	254	900	130	135	790	pin
CB-150	15T/600	254	900	150	150	950	pin
CB-200	20T/600	254	900	170	170	1250	pin
CB-240	24T/600	305	1000	180	175	1350	pin
CB-300	30T/600	355	1000	180	200	1540	pin
CB	tot 42T/1200		Op aanvraag				

Capaciteitsdiagram in Kg / mm									
Mod nr	Ø	500mm	600mm	700mm	800mm	900mm	1000mm	1100mm	1200mm
CB-15	115	1500	1250	1070	935	830	750	680	625
CB-25	150	2500	2080	1785	1560	1390	1250	1130	1040
CB-30	150	3000	2500	2140	1875	1660	1500	1360	1250
CB-40	180	4000	3330	2850	2500	2220	2000	1815	1660
CB-50	180	-	5000	4285	3750	3330	3000	2725	2500
CB-60	180	-	6000	5000	4285	3750	3330	3000	2725
CB-80	180	-	8000	6850	6000	5330	4800	4360	4000
CB-100	254	-	10000	8750	7500	6660	6000	5450	5000
CB-120	254	-	12000	10285	9000	8000	7200	6450	6000
CB-150	254	-	15000	12850	11250	10000	9000	8180	7500
CB-200	254	-	20000	17140	15000	13300	12000	10000	10000
CB-240	305	-	24000	20570	18000	16000	14400	13100	12000
CB-300	355	-	30000	25700	22500	20000	18000	16360	15000
CB	457	-	-	-	-	-	-	Mogelijk tot 42000	

Model: CB

<u>NL</u>	Voor het transport van rollen of coils L = 1000mm Q = Capaciteit / Ladingcenter	Opties:	- Speciale uitvoeringen op aanvraag - Snelmonteerklauwen
<u>FR</u>	Pour transporter des rouleaux ou des bobines L = 1000mm Q = capacité / centre de charge	Options:	- Versions spéciales sur demande - Griffes rapides
<u>EN</u>	For transporting rolls or coils L = 1000mm Q = Capacity / Load center	Options:	- Special versions on request - Quick mounting claws
<u>DE</u>	Zum Transport von Rollen oder Coils L = 1000mm Q = Kapazität / Lastmitte	Optionen:	- Sonderausführungen auf Anfrage - Schnellmontagekrallen



Pin Type